

A Bottom-up Approach for Pancreas Segmentation using Cascaded Superpixels and (Deep) Image Patch Labeling

Amal Farag^a, Le Lu^a, Holger R. Roth^a, Jiamin Liu^a, Evrim Turkbey^a, Ronald M. Summers^{a,*}

^a*Imaging Biomarkers and Computer-Aided Diagnosis Laboratory, Radiology and Imaging Sciences, National Institutes of Health Clinical Center, Building 10 Room 1C224D, MSC 1182, Bethesda, MD 20892-1182, United States*

Abstract

Robust automated organ segmentation is a prerequisite for computer-aided diagnosis (CAD), quantitative imaging analysis, detection of pathologies and surgical assistance. For anatomical high-variability organs such as the pancreas, previous segmentation approaches report low accuracies in comparison to well studied organs like the liver or heart. We present a fully-automated bottom-up approach for pancreas segmentation in abdominal computed tomography (CT) scans. The method is based on a hierarchical cascade of information propagation by classifying image patches at different resolutions and (segments) superpixels. There are four stages in the system: 1) decomposing CT slice images as a set of disjoint boundary-preserving superpixels; 2) computing pancreas class probability maps via dense patch labeling; 3) classifying superpixels by pooling both intensity and probability features to form empirical statistics in cascaded random forest frameworks; and 4) simple connectivity based post-processing. The dense image patch labeling is conducted by two schemes: efficient random forest classifier on image histogram, location and texture features; and more expensive (but with better specificity) deep convolutional neural network classification, on larger image windows (i.e., with more spatial contexts). Over-segmented 2D CT slices by the Simple Linear Iterative Clustering approach are adopted through model/parameter calibration and labeled at the superpixel level for positive (pancreas) or negative (non-pancreas background) classes. Evaluation of the approach is done on a database of 80 manually segmented CT volumes in six-fold cross-validation. Our achieved results are comparable, or better than the state-of-the-art methods (evaluated by “leave-one-patient-out”), with a Dice coefficient of 70.7% and Jaccard Index of 57.9%. In addition, the computational efficiency has been drastically improved in the order of 6 ~ 8 minutes, comparing with others of ≥ 10 hours per testing case. The segmentation framework using deep patch labeling confidences is also more numerically stable, reflected by the smaller performance metric standard deviations.

Keywords: Abdominal Computed Tomography (CT), Superpixels, Image Patch Labeling, Deep Convolutional Neural Networks, Patch-level Confidence Pooling, Cascaded Random Forest, Pancreas Segmentation.

^{*}This work was performed when all authors were at Department of Radiology and Imaging Sciences, National Institutes of Health Clinical Center. Amal Farag is currently affiliated with Kentucky Imaging and Technologies, Louisville, Kentucky; and Evrim Turkbey is with School of Medicine, Johns Hopkins University, 733 N Broadway, Baltimore, Maryland.

*Corresponding author, <http://www.cc.nih.gov/drd/summers.html>; rms@nih.gov

Email addresses: amal.aly1@gmail.com (Amal Farag), le.lu@nih.gov (Le Lu),

Preprint submitted to Elsevier Journal of Medical Image Analysis *TEX* Templates

May 22, 2015

1. Introduction

Image segmentation is a key step in image understanding that aims at separating objects within an image into classes, based on object characteristics and a prior information about the surroundings. This also applies to medical image analysis in various imaging modalities. The segmentation of abdominal organs such as the spleen, liver and pancreas in abdominal computed tomography (CT) scans can be an important input to computer aided diagnosis (CAD) systems, for quantitative and qualitative analysis and for surgical assistance. In the instance of quantitative imaging analysis of diabetic patients, a requisite critical step for the development of such CAD systems is segmentation specifically of the pancreas. Pancreas segmentation is also a necessary input for subsequent methodologies for pancreatic cancer detection. The literature is rich in methods of automatic segmentation on CT with high accuracies (e.g., Dice coefficients $> 90\%$), of other organs such as the kidneys (Cuingnet et al., 2012), lungs (Mansoor et al., 2014), heart (Zheng et al., 2008) and liver (Ling et al., 2008). Yet, high accuracy in automatic segmentation of the pancreas remains a challenge. The literature is not as abundant in either single- or multi-organ segmentation setups.

The pancreas is a highly anatomically variable organ in terms of shape and size and the location within the abdominal cavity shifts from patient to patient. The boundary contrast can vary greatly by the amount of visceral fat in the proximity of the pancreas. These factors and others make segmentation of the pancreas very challenging. Figure 1 depicts several manually segmented 3D volumes of various patient pancreases to better illustrate the variations and challenges mentioned. From the above observations, we argue that the automated pancreas segmentation problem should be treated differently, apart from the current organ segmentation literature where statistical shape models are generally used.

The organ segmentation literature can be divided into two broad categories: top-down and bottom-up approaches. In top-down approaches, a-priori knowledge such as atlas(es) and/or shape models of the organ are generated and incorporated into the framework via learning based shape model fitting (Cuingnet et al., 2012; Zheng et al., 2008; Ling et al., 2008) or volumetric image registration (Wolz et al., 2013; Chu et al., 2013; Wang et al., 2014). For bottom-up approaches segmentation are performed by local image similarity grouping and growing (Mansoor et al., 2014) or pixel, superpixel/supervoxel based labeling (Lucchi et al., 2012) since direct representations of the organ is not incorporated. Generally speaking, top-down methods are targeted for organs which can be modeled well by statistical shape models (Cuingnet et al., 2012; Zheng et al., 2008) whereas bottom-up representations are more effective for highly non-Gaussian shaped (Lucchi et al., 2012) or pathological organs.

Previous work on pancreas segmentation from CT images have been dominated by top-down approaches which rely on atlas based approaches or statistical shape modeling or both (Shimizu et al., 2010; Okada et al., 2012; Wolz et al., 2013; Chu et al., 2013; Wolz et al., 2012; Wang et al., 2014). Shimizu et al. (2010) is generally not comparable to others since it uses three-phase contrast enhanced CT datasets. The rest work are performed on single phase CT images. “Leave-one-patient-out” (LOO) cross-validation metric is adopted for all (Shimizu et al., 2010; Okada et al., 2012; Wolz et al., 2013; Chu et al., 2013; Wolz et al., 2012; Wang et al., 2014).

- Shimizu et. al (Shimizu et al., 2010) utilize three-phase contrast enhanced CT data which are first registered together for a particular patient and then registered to a reference pa-

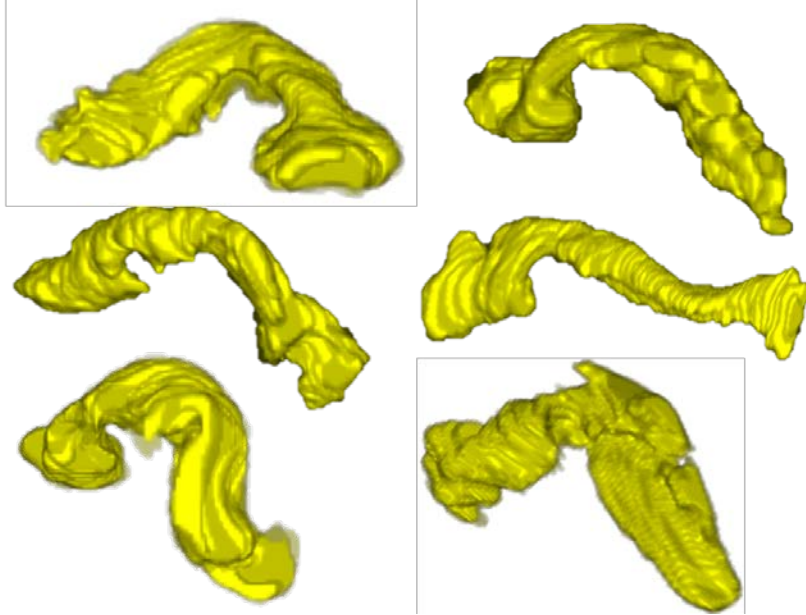


Figure 1: 3D manually segmented volumes of six pancreases from six patients. Notice the shape and size variations.

tient by landmark-based deformable registration. The spatial support area of the abdominal cavity is reduced by segmenting the liver, spleen and three main vessels associated with location interpretation of the pancreas (i.e. splenic, portal and superior mesenteric veins). Coarse-to-fine pancreas segmentation is performed by using generated patient-specific probabilistic atlas guided segmentation followed by intensity-based classification and post-processing. Validation of the approach was conducted on 20 multi-phase datasets resulting in a Jaccard of 57.9%.

- Okada et. al ([Okada et al., 2012](#)) perform multi-organ segmentation by combining inter-organ spatial interrelations with probabilistic atlases. The approach incorporated various a-priori knowledge into the model that includes shape representations of seven organs. Experimental validation was conducted on 28 abdominal contrast-enhanced CT datasets obtaining an overall volume overlap of Dice index 46.6% for the pancreas.
- Chu et. al ([Chu et al., 2013](#)) present an automated multi-organ segmentation method based on a spatially-divided probabilistic atlases. The algorithm consists of image-space division and a multi-scale weighting scheme to deal with the large differences among patients in organ shape and position in local areas. Their experimental results show that the liver, spleen, pancreas and kidneys can be segmented with Dice similarity indices of 95.1%, 91.4%, 69.1%, and 90.1%, respectively, using 100 annotated abdominal CT volumes.
- Wolz et. al ([Wolz et al., 2013](#)) may be considered the state-of-the-art result thus far for single-phase pancreas segmentation. The approach is a multi-organ segmentation approach that combines hierarchical weighted subject-specific atlas-based registration and patch-based segmentation. Post-processing is in the form of optimized graph-cuts with a learned

intensity model. Their results in terms of a Dice overlap for the pancreas is 69.6% on 150 patients and 58.2% on a sub-population of 50 patients.

- Recent work by Wang et. al (Wang et al., 2014) proposes a patch-based label propagation approach that uses relative geodesic distances. The approach can be considered a start to developing some bottom-up component for segmentation, where affine registration between dataset and atlases were conducted followed by refinement using the patch-based segmentation to reduce misregistrations and instances of high anatomy variability. The approach was evaluated on 100 abdominal CT scans with an overall Dice of 65.5% for the pancreas segmentation.

In this paper, a new fully bottom-up approach using image and (deep) patch-level labeling confidences for pancreas segmentation is proposed using 80 single phase CT patient data volumes. The approach is motivated to improve the segmentation accuracy of *highly deformable organs*, like the pancreas, by leveraging *middle-level representation of image segments*. First, over segmentation of all 2D slices of an input patient abdominal CT scan is obtained as a semi-structured representation known as superpixels. Second, classifying superpixels into two semantic classes of pancreas and non-pancreas is conducted as a multi-stage feature extraction and random forest (RF) classification process, on the image and (deep) patch-level confidence maps, pooled at the superpixel level. A preliminary version of the approach has been published in (Farag et al., 2014). In this article an extension of using deep convolutional neural networks (CNN) to obtain and aggregate the dense patch labeling probabilities has been exploited, in conjunction with the image patch-level labels, to leverage rich CNN image features. Two cascaded random forest superpixel classification frameworks are addressed and compared. Figure 2 depicts the overall proposed first framework. Figure 11 illustrates the modularized flow charts of both frameworks. Our experimental results are carried-out in a six-fold cross-validation manner. Our system runs at least two orders of magnitude more computationally efficiently to process a new testing case than atlas registration approaches (Shimizu et al., 2010; Okada et al., 2012; Wolz et al., 2013; Chu et al., 2013; Wolz et al., 2012; Wang et al., 2014).

The default experimental setting in many of the atlas based approaches (Wang et al., 2014; Wolz et al., 2013; Chu et al., 2013; Wolz et al., 2012; Shimizu et al., 2010) is conducted in a “leave-one-patient-out” or “leave-one-out” criterion for up to N=150 patients. In the clinical setting leave-one-out based dense volume registration (from all other N-1 patients as atlas templates) and label fusion process may be computationally impractical (10+ hours per testing case). More importantly, it does not scale up easily when large scale datasets are present. As such, we employed 6-fold cross-validation. The information learned from the training folds is captured and compactly encoded as the image patch-level and superpixel-level classifiers (RFs and CNN). The proposed bottom-up approach is more efficient in both memory and computation speed than the multi-atlas registration framework (Wang et al., 2014; Wolz et al., 2013; Chu et al., 2013; Wolz et al., 2012; Shimizu et al., 2010; Okada et al., 2012). Evaluation of our method on a database of 80 manually segmented CT volumes in a six-fold cross-validation scheme has been conducted. Our achieved results are comparable, or better than the state-of-the-art methods (“leave-one-patient-out”, or LOO), with a Dice coefficient of 70.7% and Jaccard Index of 57.9%. The strict numerical performance comparison is not possible at this time point since experiments are not evaluated on the same benchmark datasets¹.

¹We plan to release our annotated pancreas segmentation datasets upon publication at National Biomedical Imaging Archive (ncia.nci.nih.gov), to ease future comparisons.

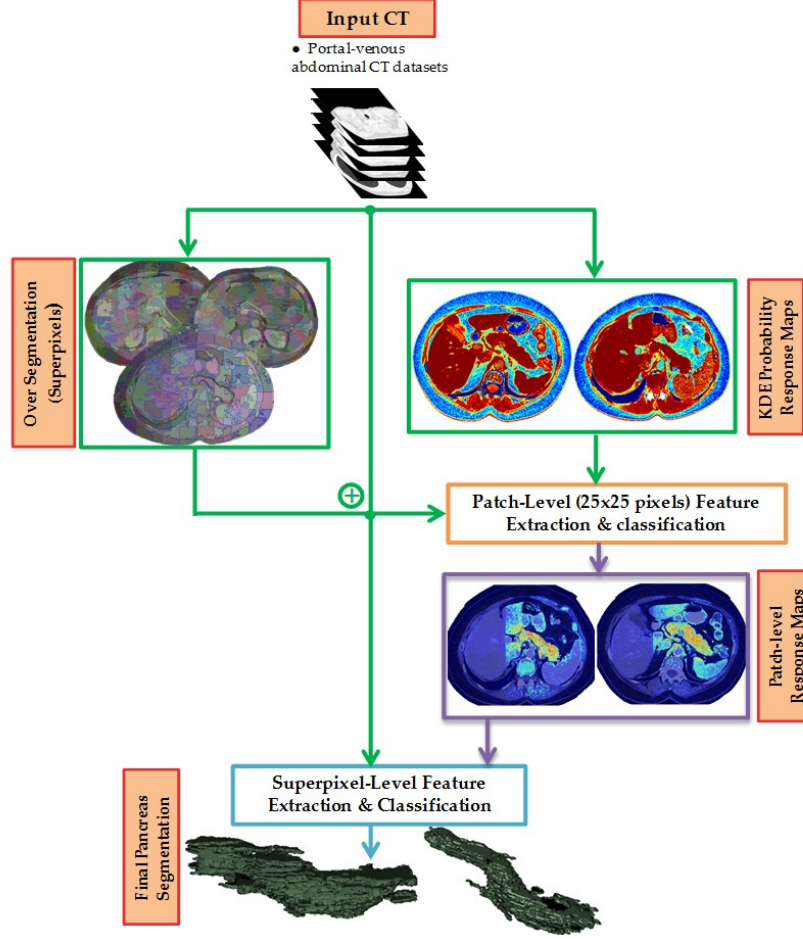


Figure 2: Overall pancreas segmentation framework via image patch labeling (F-1).

Superpixel based representation on pathological region detection and segmentation is recently studied in (Mahapatra et al., 2013) where MRI datasets are used. However their technical aspects on problem representation, visual feature extraction, classification framework and implementation vary significantly from our approach.

2. Methods

In this section the components of our overall framework shown in Figure 2 and Figure 11 are addressed in details.

2.1. Boundary-preserving over-segmentation

Over-segmentation occurs when images (or more generally grid graphs) are segmented or decomposed into smaller perceptually meaningful regions, “superpixels”. Within a superpixel,

pixels carry similarities in color, texture, intensity, etc. and generally align with image edges rather than rectangular patches (i.e. superpixels can be irregular in shape and size). In the computer vision literature, numerous approaches have been proposed for superpixel segmentation (Achanta et al., 2012; Neubert and Protzel, 2012; Liu et al., 2011; Felzenszwalb and Huttenlocher, 2004; Vincent and Soille, 1991). Each approach has its drawbacks and advantages but three main properties are generally examined when deciding the appropriate method for an application as discussed in (Neubert and Protzel, 2012): 1) adherence to image boundaries; 2) computationally fast, ease of usage and memory efficient; especially when computational complexity reduction is of importance and 3) improvement on both quality and speed of the final segmentation output.

Superpixel methods fall under two main broad categories: graph-based (e.g. SLIC (Achanta et al., 2012), entropy rate (Liu et al., 2011) and (Felzenszwalb and Huttenlocher, 2004)) and gradient ascent methods (e.g. watershed (Vincent and Soille, 1991) and mean shift (Comaniciu and Meer, 2002)). In terms of computational complexity, (Felzenszwalb and Huttenlocher, 2004; Vincent and Soille, 1991) are relatively fast in $O(M \log M)$ complexity where M is the number of pixels or voxels in the image or grid graph. Mean shift (Comaniciu and Meer, 2002) and normalized cut (Cour et al., 2005) are $O(M^2)$, or $O(M^3)$, respectively. Simple linear iterative clustering (SLIC) (Achanta et al., 2012) is both fast and memory efficient. In our work, evaluation and comparison among three graph-based superpixel algorithms (i.e. SLIC (Achanta et al., 2012; Neubert and Protzel, 2012), efficient graph-based (Felzenszwalb and Huttenlocher, 2004) and Entropy rate (Liu et al., 2011)) and one gradient ascent method (i.e. watershed (Vincent and Soille, 1991)) are conducted, considering the three criterion in (Neubert and Protzel, 2012). Figure 3 shows sample superpixel results using the SLIC approach. The original CT slices and cropped zoomed-in pancreas superpixel regions are demonstrated. The boundary recall, a typical measurement used in the literature, to indicate how many “true” edge pixels of the ground truth object segmentation are within a pixel range from the superpixels (i.e., object-level edges are recalled by superpixel boundaries). High boundary recall indicates minimal true edges were neglected. Figure 4 shows sample quantitative results. Based on Figure 3, high boundary recalls, within the distance ranges between 1 and 6 pixels from the semantic pancreas ground-truth boundary annotation are obtained using the SLIC approach. The watershed approach provided the least promising results for usage in the pancreas, due to the lack of conditions in the approach, to utilize boundary information in conjunction with intensity information as implemented in graph-based approaches. The superpixel number range per axial image is constrained $\in [100, 200]$ to make a good trade-off on superpixel dimensions or sizes.

The overlapping ratio r of the superpixel versus the ground-truth pancreas annotation mask is defined as the percentage of pixels/voxels inside each superpixel that are annotated as pancreas. By thresholding on r , say if $r > \tau$ the superpixel will be labeled as pancreas and otherwise as background, we can obtain the pancreas segmentation results. When $\tau = 0.50$, the achieved mean Dice coefficient is $81.2\% \pm 3.3\%$ which is referred as the “Oracle” segmentation accuracy since computing r would require to know the ground-truth segmentation. This is also the upper bound segmentation accuracy for our superpixel labeling or classification framework. $81.2 \pm 3.3\%$ is significantly higher and numerically more stable (in standard deviation) than previous state-of-the-art methods (Wang et al., 2014; Wolz et al., 2013; Chu et al., 2013; Wolz et al., 2012; Shimizu et al., 2010), to provide considerable improvement space of our work. Note that both the choices of SLIC and $\tau = 0.50$ are calibrated using a subset of 20 scans. We find there is no need to evaluate different superpixel generation methods/parameters and τ s as “model selection” using the training folds in each round of six-fold cross-validation. This superpixel

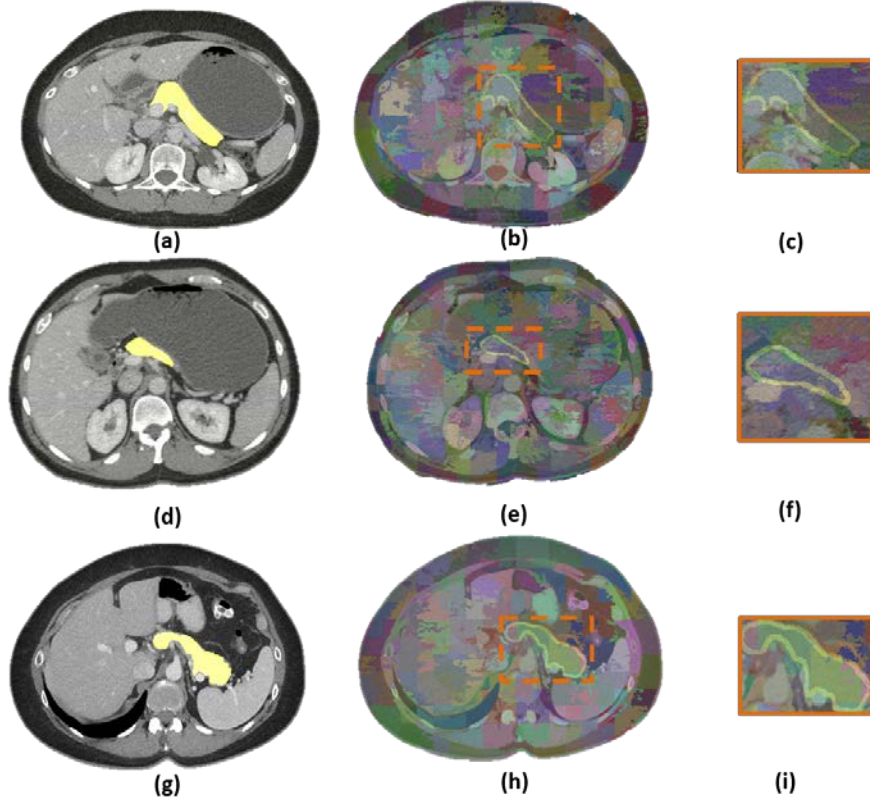


Figure 3: Sample superpixel generation results from the SLIC method (Achanta et al., 2012). First column depicts different slices from different patient scans with the ground-truth pancreas segmentation in yellow (a, d & g). The second column depicts the over segmentation results with the pancreas contours superimposed on the image (b, e & h). Last, (c) (f) and (i) show zoomed-in areas of the pancreas superpixel results from (b) (e) and (h).

calibration procedure is generalized well to all our datasets. Voxel-level pancreas segmentation can be propagated from superpixel-level classification and further improved by efficient narrow-band level-set based curve evolution (Shi and Karl, 2008), or the learned intensity model based graph-cut (Wolz et al., 2013).

Mid-level visual representation like superpixels has been widely adopted in recent *PASCAL VOC* semantic segmentation challenges (Everingham et al., 2015) from computer vision. Generally speaking, a diverse set of plausible segments are expected per image to be fully exploited by later employed probabilistic models (Yadollahpour et al., 2013). Particularly, CPMC (Constrained Parametric Min-Cuts) based image segment generation process has achieved the state-of-the-art results for 20 object categories (Carreira and Sminchisescu, 2012). Segments are extracted around regularly placed foreground seeds against varying background seeds (with respect to image boundary edges) using all levels of foreground bias (Carreira and Sminchisescu, 2012). CPMC has the effect of producing diverse segmentations at various locations and spatial scales however it is computationally expensive (in the order of 10 minutes for an image of 256×256

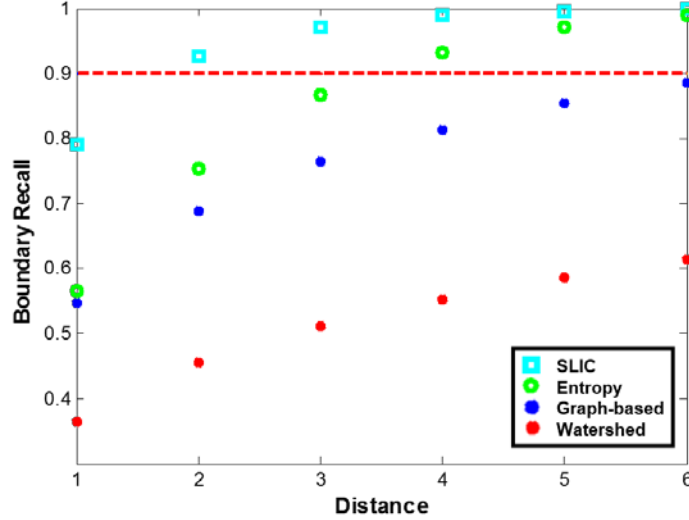


Figure 4: Superpixels boundary recall results evaluated on 20 patient scans (Distance in millimeters). The watershed method (Vincent and Soille, 1991) is shown in red, efficient graph (Felzenszwalb and Huttenlocher, 2004) in blue while the SLIC (Achanta et al., 2012) and the Entropy rate (Liu et al., 2011) based methods are depicted in cyan and green, respectively. The red line represents the 90% marker.

pixels). For many patients (especially those with low body fat indexes) in our study, the contrast strengths of pancreas boundaries can be much weaker than PASCAL images (where the challenge more lies on the visually cluttered nature of multi-class objects). CPMC may not be effective on preserving pancreas boundaries.

Extension of superpixels to supervoxels is possible but in this work preference is made to 2D superpixel representation, due to the potential boundary leakage problem of supervoxels that may deteriorate the pancreas segmentation severely in multiple CT slices. Object level pancreas boundaries in abdominal CT images can appear very weakly, especially for patients with less body fat. On the other hand, as in Sec. 2.2, image patch based appearance descriptors and statistical models are well developed for 2D images (in both computer vision and medical imaging). Using 3D statistical texture descriptors and models to accommodate supervoxels can be computationally expensive, but without obvious performance improvement (Lucchi et al., 2012; Arbelez et al., 2014).

In the next Sec. 2.2 and Sec. 2.3, we describe two different methods for dense image patch labeling using histogram/texture features and a deep Convolutional Neural Network.

2.2. Patch-level Visual Feature Extraction and Classification: P^{RF}

Feature extraction is a form of object representation that aims at capturing the important shape, texture and other salient features that allow distinctions between the desired object (i.e. pancreas) and the surrounding to be made. In this work a total of 46 patch-level image features to depict the pancreas and its surroundings are implemented. The overall 3D abdominal body region per patient is first segmented and identified using a standard table-removal procedure where all voxels outside the body are removed.

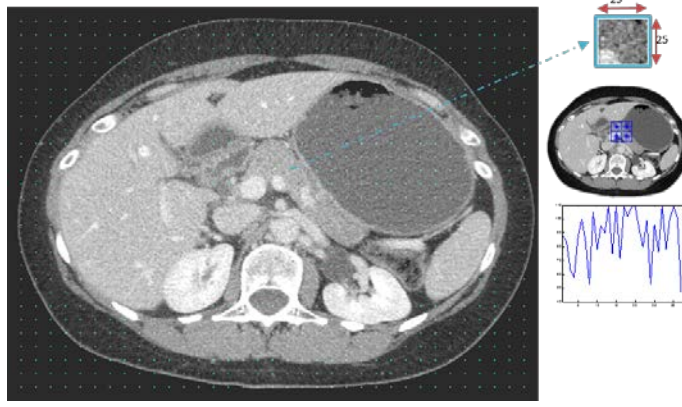


Figure 5: Sample slice with center positions superimposed as green dots. The 25x25 image patch and corresponding D-SIFT descriptors are shown to the right of the original image.

1), To describe the texture information, we adopt the Dense Scale-Invariant Feature transform (dSIFT) approach (Vedaldi and Fulkerson, 2008) which is derived from the SIFT descriptor (Lowe, 2004) with several technical extensions. The publicly available VLFeat implementation of the dSIFT is employed (Vedaldi and Fulkerson, 2008). Figure 5 depicts the process implemented on a sample image slice. The descriptors are densely and uniformly extracted from image grids with inter-distances of 3 pixels. The patch center position are shown as the green points superimposed on the original image slice. Once the positions are known, the dSIFT is computed with the geometry of $[2 \times 2]$ bins and bin size of 6 pixels, which results in a 32 dimensional texture descriptor for each image patch. The image patch size in this work is fixed at 25x25 which is a trade-off between computational efficiency and description power. Empirical evaluation of the image patch size is conducted for the size range of 15 to 35 pixels using a small sub-sampled dataset for classification, as described later. Stable performance statistics are observed and quantitative experimental results using the default patch size of 25x25 pixels are reported.

2), A second feature group using the voxel intensity histograms of the ground-truth pancreas and the surrounding CT scans is built in the class-conditional probability density function (PDF) space. A kernel density estimator (KDE) was created using the voxel intensities from a subset of randomly selected patient CT scans. The KDE represented the CT intensity distributions of the positive $\{X^+\}$ and negative class $\{X^-\}$ of pancreas and non-pancreas voxels CT image information. Let, $\{X^+\} = \{h_1^+, h_2^+, \dots, h_n^+\}$ and $\{X^-\} = \{h_1^-, h_2^-, \dots, h_m^-\}$ where h_1^+ and h_m^- represent the intensity values for the positive and negative pixel samples for all 26 patient CT scans, over the entire abdominal CT Hounsfield range. The kernel density estimators $f^+(X^+) = \frac{1}{n} \sum_{i=1}^n K(X^+ - X_i^+)$ and $f^-(X^-) = \frac{1}{m} \sum_{j=1}^m K(X^- - X_j^-)$ are computed where $K()$ is assumed to be a Gaussian kernel. The normalized likelihood ratio is calculated which becomes a probability value as a function of intensity in the range of $H = [0 : 1 : 4095]$. Thus, the probability of being considered pancreas is formulated as: $y^+ = \frac{f^+(X^+)}{(f^+(X^+) + f^-(X^-))}$. This function is converted as a pre-computed look-up table over $H = [0 : 1 : 4095]$, which allows very efficient $O(1)$ access time. Figure 6 depicts the normalized KDE histogram computed and sample 2D probability response result on a CT slice. High probability regions are red in color

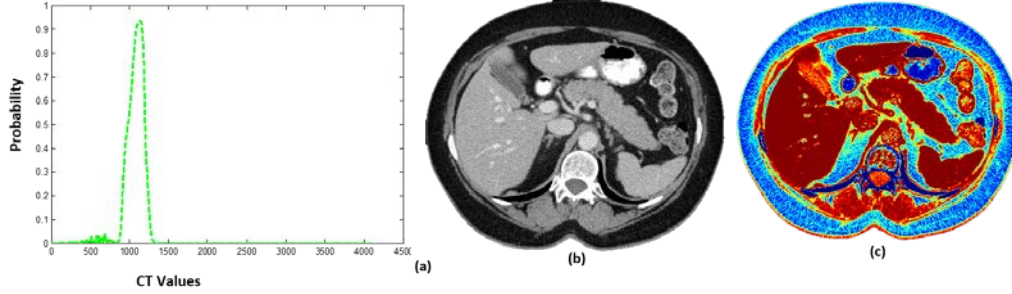


Figure 6: Examples of computed KDE histogram (a) and sample 2D probability response map (c) of the original CT in (b). Red presents higher value; blue for lower probability.

and low probabilities in blue. In the original CT intensity domain the mean, median and standard deviation (std) statistics over the full 25×25 pixel range per image patch, P , are extracted.

3), Utilizing first the KDE probability response maps above and the superpixel CT masks described in Sec. 2.1, as underlying supporting masks to each image patch, the same KDE response statistics within the intersected sub-regions, P' of P , are extracted. The idea is that an image patch, P , may be divided into more than one superpixel. This set of statistics is calculated with respect to the most representative superpixel (that covers the patch center pixel). In this manner, object boundary-preserving intensity features are obtained (Kim and Grauman, 2011).

4), The final two features for each axial slice (in the patient volumes) are the normalized relative x-axis and y-axis positions $c[0, 1]$, computed at each image patch center against the segmented body region (self-normalized² to patients with different body masses to some extent). Once all of the features are concatenated together, a total of 46 image patch-level features per superpixel are used to train a random forest (RF) classifier C_p . Image patch labels are obtained by directly borrowing the class information of their patch center pixels, based on the manual segmentation.

To resolve the data unbalancing issue between the positive (pancreas) and negative (non-pancreas) class patches (during RF training), the sample weights for two classes are normalized so that the sum of the sample weights for each class will reach the same constant (i.e., assuming a uniform prior). This means, when calculating the empirical two class probabilities at any RF leaf node, the positive and negative samples (reached at that node) contribute with different weights. Pancreas class patch samples are weighted much higher than non-pancreas background class instances since they are more rare. Similar sample reweighting scheme is also exploited in the regression forest for anatomy localization (Criminisi et al., 2013).

Six-fold cross-validation for RF training is carried-out. Response maps are computed for the image patch-level classification and dense labeling. Figure 7 (d) and (h) show sample illustrative slices from different patients. High probability corresponding to the pancreas is represented by the red color regions (the background is blue). The response maps (denoted as P^{RF}) allow

²The axial reconstruction CT scans in our study have largely varying ranges or extends in the z-axis. If some anatomical landmarks, such as the bottom plane of liver, the center of kidneys, can be provided automatically, the anatomically normalized z-coordinate positions for superpixels can be computed and used as an additional spatial feature for RF classification.

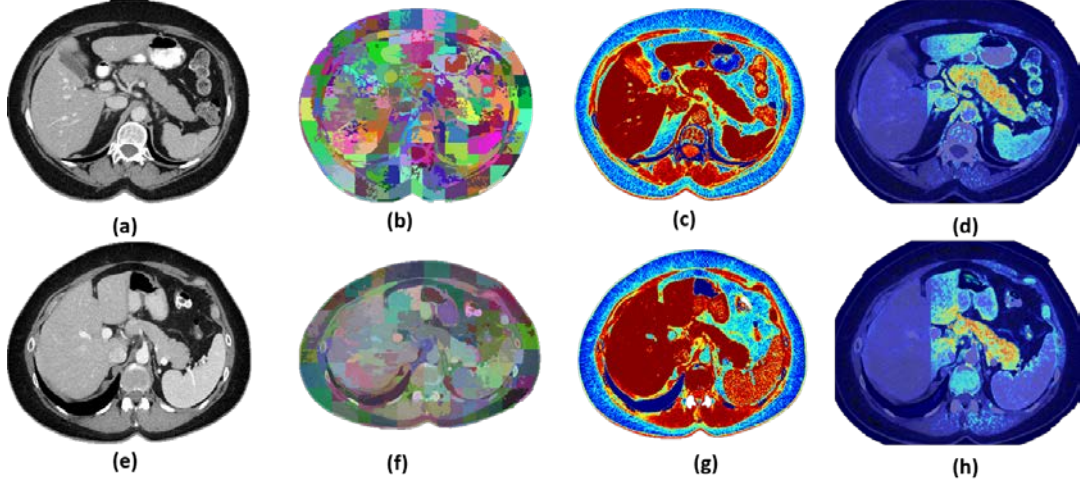


Figure 7: Two sample slices from different patients are shown in (a) and (e). The corresponding superpixels segmentation (b,f), KDE probability response maps (c, g) and RF patch-level probability response maps (d, h) are shown. In (c,g) and (d,h), red represents highest probabilities. In (d,h) the purple color represents areas where probabilities are so small and can be deemed insignificant areas of interest.

several observations to be made. The most interesting is that the relative x and y positions as features allow for clearer spatial separation of positive and negative regions, via internal RF feature thresholding tests on them. The trained RF classifier is able to recognize the negative class patches residing in the background, such as liver, vertebrae and muscle using spatial location cues. In Figure 7(d,h) implicit vertical and horizontal decision boundary lines can be seen in comparison to Figure 6(c,g). This demonstrates the superior descriptive and discriminative power of the feature descriptor on image patches (P and P') than single pixel intensities. Organs with similar CT values are significantly depressed in the patch-level response maps.

In summary, SIFT and its variations, e.g., D-SIFT have shown to be informative, especially through spatial pooling or packing (Gilinsky and Zelnik-Manor, 2013). A wide range of pixel-level correlations and visual information per image patch is also captured by the rest of 14 defined features. Both good classification specificity and recall have been obtained in cross-validation using Random Forest implementation of 50 trees and the minimum leaf size set as 150 (i.e., using the *treebagger*(•) function in Matlab).

2.3. Patch-level Labeling via Deep Convolutional Neural Network: P^{CNN}

In this work, we use Convolutional Neural Network (CNN) with a standard architecture for binary image patch classification. Five layers of convolutional filters first compute, aggregate and assemble the low level image features to more complex ones, in a layer-by-layer fashion. Other CNN layers perform max-pooling operations or consist of fully-connected neural network layers. The CNN model we adopted ends with a final two-way softmax classification layer for ‘pancreas’ and ‘non-pancreas’ classes (refer to Figure 8). The fully connected layers are constrained using “DropOut” in order to avoid over-fitting in training where each neuron or node has a probability of 0.5 to be reset with a 0-valued activation. DropOut is a method that behaves as a co-adaption regularizer when training the CNN (Srivastava et al., 2014). In testing, no DropOut operation

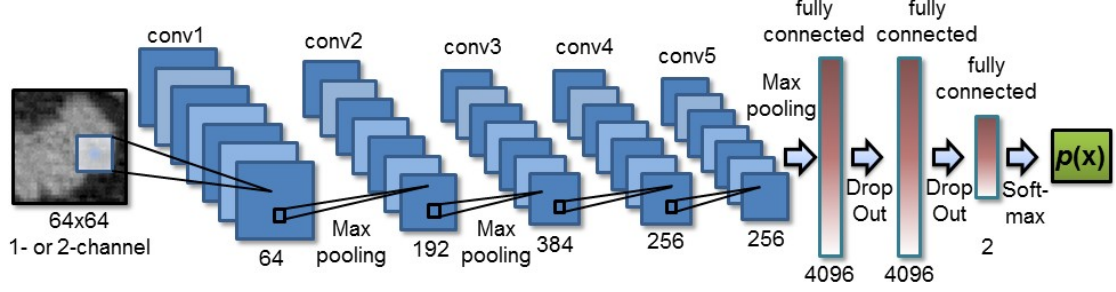


Figure 8: The proposed CNN model architecture is composed of five convolutional layers with max-pooling and two fully-connected layers with DropOut (Srivastava et al., 2014) connections. A final 2-way softmax layer gives a probability $p(x)$ of ‘pancreas’ and ‘non-pancreas’ per data sample (or image patch). The number and model parameters of convolutional filters and neural network connections for each layer are as shown.

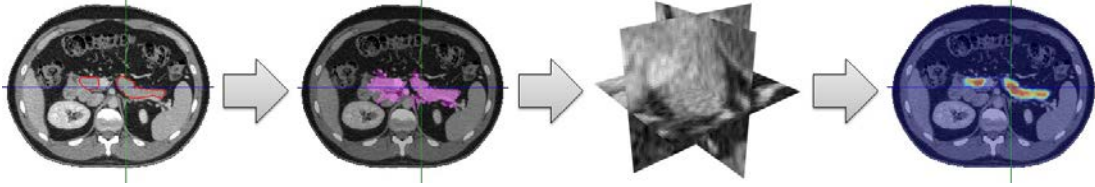


Figure 9: Axial CT slice of a manual (gold standard) segmentation of the pancreas. From *Left to Right*, there are the ground-truth segmentation contours (in red); RF based coarse segmentation $\{S_{RF}\}$; a 2.5D input image patch to CNN and the deep patch labeling result using CNN.

is needed. Modern GPU acceleration allows efficient training and run-time testing of the deep CNN models. We use the publicly available codebase of *cuda-convnet2*³.

To extract dense image patch response maps, we use a straight-forward sliding window approach that extracts 2.5D image patches composed of axial, coronal and sagittal planes at any image positions (see Figure 9). Deep CNN architecture can encode large scale image patches (even the whole 224×224 pixel images (Krizhevsky et al., 2012)) very efficiently and no hand crafted image features are required any more. In this paper, the dimension of image patches for training CNN is 64×64 pixels which is significantly larger than 25×25 in Sec. 2.2. The larger spatial scale or context is generally expected to achieve more accurate patch labeling quality. For efficiency reasons, we extract patches every f voxels for CNN feedforward evaluation and then apply nearest neighbor interpolation⁴ to estimate the values at skipped voxels. Three examples of dense CNN based image patch labeling are demonstrated in Figure 10. We denote the CNN model generated probability maps as P^{CNN} .

The computational expense of deep CNN patch labeling per patch is still higher than Sec. 2.2. In practice, dense patch labeling by P^{RF} runs exhaustively at 3 pixel interval but P^{CNN} are only evaluated at pixel locations that pass the first stage of a cascaded random forest superpixel classification framework (detailed in Sec. 2.4).

³<https://code.google.com/p/cuda-convnet2>

⁴In our empirical testing, simple nearest neighbor interpolation seems sufficient due to the high quality of deep CNN probability predictions.

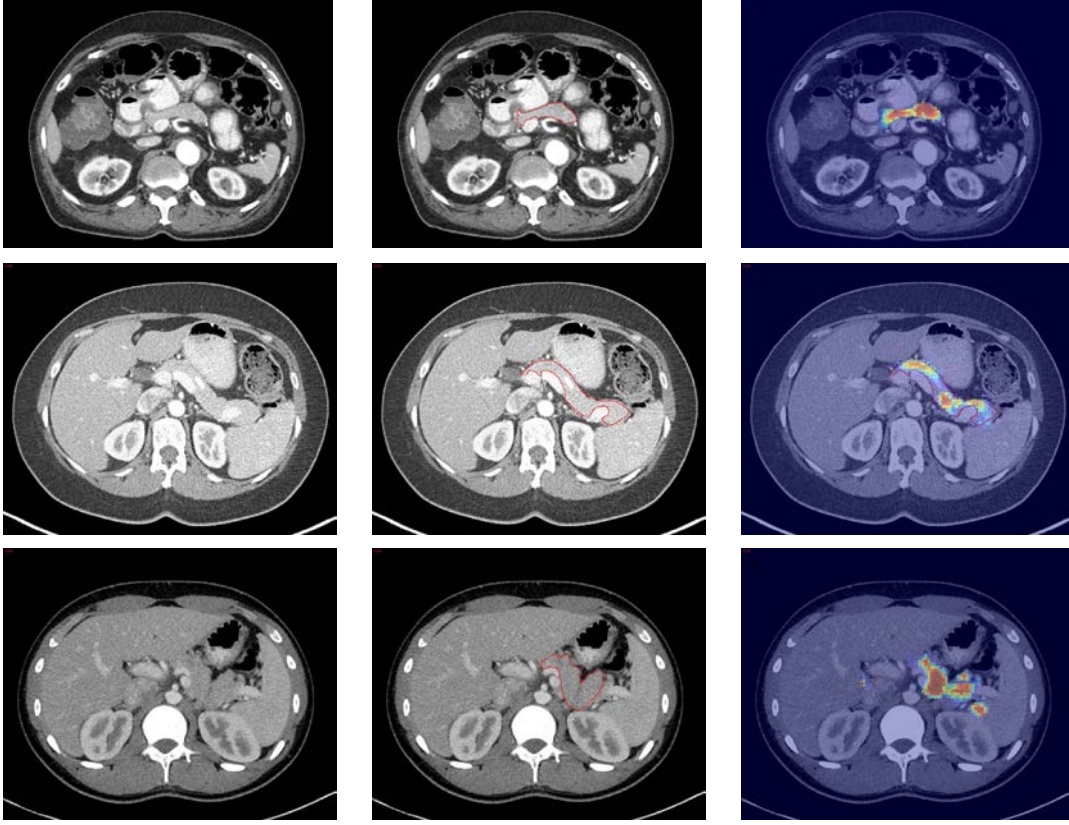


Figure 10: Three examples of deep CNN based image patch labeling probability response maps per row. Red color shows stronger pancreas class response and blue presents weaker response. From Left, Center to Right are the original CT image, CT image with annotated pancreas contour in red, and CNN response map overlaid CT image.

2.4. Superpixel-level Feature Extraction, Cascaded Classification and Pancreas Segmentation

In this section, we trained three different superpixel-level random forest classifiers of $C_{SP} 1$, $C_{SP} 2$ and $C_{SP} 3$. These three classifier components further formed two cascaded RF classification frameworks (F-1, F-2), as shown in Figure 11. The superpixel labels are inferred from the overlapping ratio r (defined in Sec. 2.1) between the superpixel label map and the ground-truth pancreas mask. If $r \geq 0.5$, the superpixel is positive while if $r \leq 0.2$, the superpixel is assigned as negative. For the rest of superpixels that fall within $0.2 < r < 0.5$ (a relatively very small portion/subset of all superpixels), they are considered ambiguous and not assigned a label and as such not used in training.

Training C_{SP}^1 utilizes both the original CT image slices (I^{CT} in Figure 11) and the probability response maps (P^{RF}) via the hand-crafted feature based patch-level classification (i.e. Sec.2.2). The 2D superpixel supporting maps (i.e., Sec.2.1) are used for feature pooling and extraction on a superpixel level. The CT pixel intensity/attenuation numbers and the per-pixel pancreas class probability response values (from dense patch labeling of P^{PF} or P^{CNN} later) within each superpixel are treated as two empirical unordered distributions. Thus our superpixel

classification problem is converted as modeling the difference between empirical distributions of positive and negative classes. We compute 1) simple statistical features of the 1st-4th order statistics such as mean, std, skewness, kurtosis (Groeneveld and Meeden, 1984) and 2) histogram-type features of eight percentiles (20%, 30%, . . . , 90%), per distribution in intensity or P^{RF} channel, respectively. Once concatenated, the resulted 24 features for each superpixel instance is fed to train random forest classifiers.

Due to the highly unbalanced quantities between foreground (pancreas) superpixels and background (the rest of CT volume) superpixels, a two-tiered cascade of random forests are exploited to address this type of rare event detection problem (Viola and Jones, 2004). In a cascaded classification, C_{SP}^1 once trained is applied exhaustively on scanning all superpixels in an input CT volume. Based on the receiver operating characteristic (ROC) curves in Figure 12 (Left) for C_{SP}^1 , we can safely reject or prune 97% negative superpixels while maintaining nearly $\sim 100\%$ recall or sensitivity. The remained 3% negatives, often referred as “hard negatives” (Viola and Jones, 2004), along with all positives are employed to train the second C_{SP}^2 in the same feature space. Combining C_{SP}^1 and C_{SP}^2 is referred to as Framework 1 (F-1) in the subsequent sections.

Similarly, we can train a random forest classifier C_{SP}^3 by replacing C_{SP}^2 ’s feature extraction dependency on the P^{RF} probability response maps, with the deep CNN patch classification maps of P^{CNN} . The same 24 statistical moments and percentile features per superpixel, from two information channels I^{CT} and P^{CNN} , are extracted to train C_{SP}^3 . Note that the CNN model that produces P^{CNN} is trained with the image patches sampled from only “hard negative” and positive superpixels (aligned with the second-tier RF classifiers C_{SP}^2 and C_{SP}^3). For simplicity, P^{RF} is only trained once with all positive and negative image patches. This will be referred to as Framework 2 (F-2) in the subsequent sections. F-1 only use P^{RF} whereas F-2 depends on both P^{RF} and P^{CNN} (with a little extra computational cost).

The flow chart of frameworks 1 (F-1) and 2 (F-2) is illustrated in Figure 11. The two-level cascaded random forest classification hierarchy is found empirically to be sufficient (although a deeper cascade is possible) and implemented to obtain F-1: C_{SP}^1 and C_{SP}^2 , or F-2: C_{SP}^1 and C_{SP}^3 . The binary 3D pancreas volumetric mask is obtained by stacking the binary superpixel labeling outcomes (after C_{SP}^2 in F-1 or C_{SP}^3 in F-2) for each 2D axial slice, followed by 3D connected component analysis implemented in the end. By assuming the overall pancreas connectivity of its 3D shape, the largest 3D connected component is kept as the final segmentation. The binarization thresholds of random forest classifiers in C_{SP}^2 and C_{SP}^3 ⁵ are calibrated using data in the training folds in 6-fold cross-validation, via a simple grid search.

3. DATA AND EXPERIMENTAL RESULTS

3.1. Imaging Data

80 3D abdominal portal-venous contrast enhanced CT scans (~ 70 seconds after intravenous contrast injection) acquired from 53 male and 27 female subjects are used in our study for evaluation. 17 of the subjects are from a kidney donor transplant list of healthy patients that have abdominal CT scans prior to nephrectomy. The remaining 63 patients are randomly selected by a radiologist from the Picture Archiving and Communications System (PACS) on the population

⁵ C_{SP}^3 can be learned using all three available information channels of I^{CT} , P^{RF} and P^{CNN} that will produce 36 superpixel-level features. Based on our initial empirical evaluation, I^{CT} and P^{CNN} is as sufficient as using all three channels.

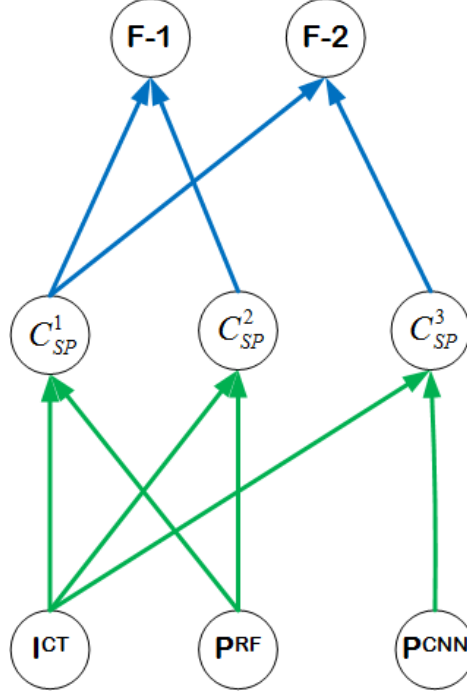


Figure 11: The flow chart of input channels and component classifiers to form the overall frameworks 1 (F-1) and 2 (F-2). I^{CT} indicates the original CT image channel; P^{RF} represents the probability response map by RF based patch labeling in Sec. 2.2 and P^{CNN} from deep CNN patch classification in Sec. 2.3, respectively. Superpixel level random forest classifier C_{SP}^1 is trained with all positive and negative superpixels in I^{CT} and P^{RF} channels; C_{SP}^2 and C_{SP}^3 are learned using only “hard negatives” and all positives, in the I^{CT} and P^{RF} or I^{CT} and P^{CNN} channels, respectively. Forming $C_{SP}^1 \rightarrow C_{SP}^2$, or $C_{SP}^1 \rightarrow C_{SP}^3$ into two overall cascaded models results in frameworks F-1 and F-2.

that has neither major abdominal pathologies nor pancreatic cancer lesions. The CT datasets are obtained from National Institutes of Health Clinical Center. Subjects range in the age from 18 to 76 years with a mean age of 46.8 ± 16.7 . Scan resolution has 512×512 pixels (varying pixel sizes) with slice thickness ranging from 1.5 – 2.5 mm on Philips and Siemens MDCT scanners. The tube voltage is 120 kVp. Manual ground-truth segmentation masks of the pancreas for all 80 cases are provided by a medical student and verified/modified by a radiologist.

3.2. Experiments

Quantitative experimental results are assessed using six-fold cross-validation, as described in Sec. 2.2 and Sec. 2.4. Several metrics to evaluate the accuracy and robustness of the methods are computed. The Dice similarity index which interprets the overlap between two sample sets, $SI = 2(|A \cap B|) / (|A| + |B|)$ where A and B refer to the algorithm output and manual ground-truth 3D pancreas segmentation, respectively. The Jaccard index (JI) is another statistic used to compute similarities between the segmentation result against the reference standard, $JI = (|A \cap B|) / (|A \cup B|)$, called “intersection over union” in the PASCAL VOC challenges (Everingham et al., 2015; Carreira and Sminchisescu, 2012). The volumetric recall (i.e. sensitivity) and precision values are also reported.

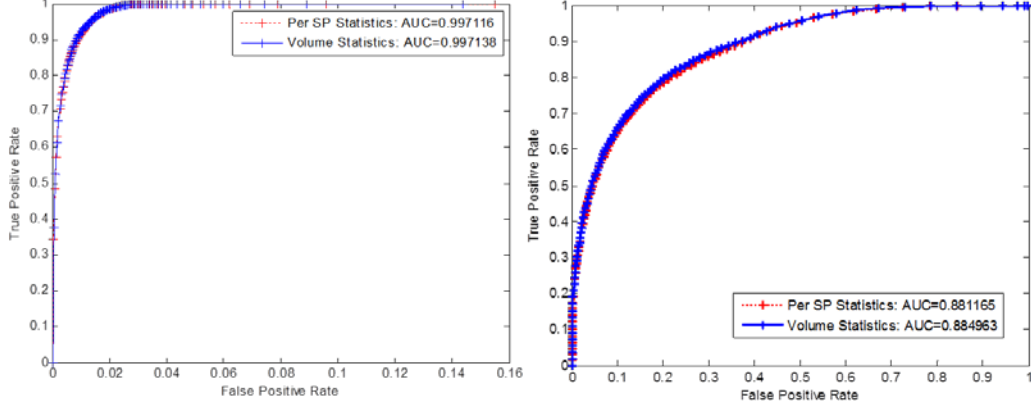


Figure 12: ROC curves to analyze the superpixel classification results, in a two layer cascade of RF classifiers: **(Left)** the first layer classifier, C_{SP}^1 and **(Right)** the second layer classifier, C_{SP}^2 . Red plots are using each superpixel as a count to calculate sensitivity and specificity. In blue plots, superpixels are weighted by their sizes (e.g., numbers of pixels and pixel sizes) for sensitivity and specificity calculation.

Figure 12 illustrates the ROC curves for 6-fold cross-validation of the two-tiered superpixel-level classifiers C_{SP}^1 and C_{SP}^2 . Red plots use each superpixel as a count to compute sensitivity and specificity. In blue plots, superpixels are weighted by their sizes (e.g., numbers of pixels and pixel sizes) for sensitivity and specificity calculation. The Area Under Curve (AUC) values of C_{SP}^2 are noticeably lower than C_{SP}^1 AUC values (0.884 versus 0.997), indicating which is much harder to train since it employs the “hard negatives” as negative samples what are classified positively by C_{SP}^1 . Random Forest classifiers with 50 \sim 200 trees are evaluated, with similar empirical performances. The AUC value of C_{SP}^3 by swapping the probability response maps from P^{RF} to P^{CNN} does improve to 0.916, compared to 0.884 using C_{SP}^2 in the pixel-weighted volume metric. This demonstrates the performance benefit of using CNN for dense patch labeling (Sec. 2.3) compared to hand-crafted image features (Sec. 2.2).

Next, the pancreas segmentation performance evaluation is conducted in respect to the total number of patient scans used for the training and testing phases. Using our framework F1 on 40, 60 and 80 (i.e. 50%, 75% and 100% of the total 80 datasets) patient scans, the Dice, JI, Precision and Recall are computed under six-fold cross-validation. Table 1 shows the computed results using image patch-level features and multi-level classification (i.e., performing C_{SP}^1 and C_{SP}^2 on I^{CT} and P^{RF}) and how performance changes with the additions of more patients data. Steady improvements of $\sim 4\%$ in the Dice coefficient and $\sim 5\%$ for the Jaccard index are observed, from 40 to 60, and 60 to 80. Figure 13 illustrates some sample final pancreas segmentation results from the 80 patient execution (i.e. Test 3 in Table 1) for two different patients. The results are divided into three categories: good, fair and poor. The good category refers to the computed Dice coefficient above 90% (of 15 patients), fair result as $50\% \leq \text{Dice} \leq 90\%$ (49 patients) and poor for $\text{Dice} < 50\%$ (16 patients). Figure 14 shows an example of pancreas segmentation result, comparing with the corresponding ground truth in 3D, with a surface-to-surface distance map.

Then, we evaluate the difference of the proposed framework 1 (F-1) versus framework 2 (F-2) on 80 patients, using the same four metrics (i.e., Dice, JI, precision and recall). Table 1 shows the comparison results. The same six-fold cross validation criterion is employed so that direct

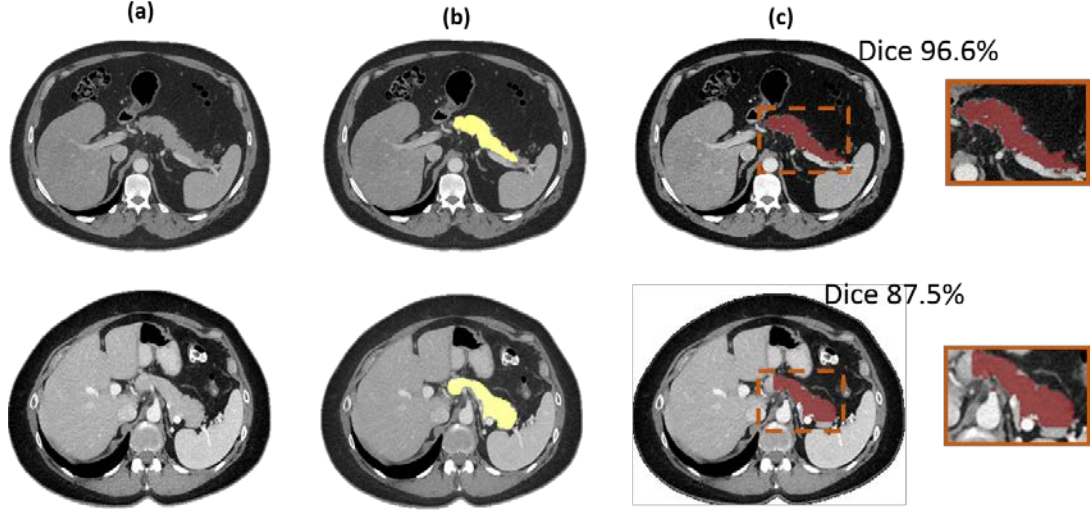


Figure 13: Pancreas segmentation results with the computed Dice coefficients. Sample original CT slices for both patients are shown in (Left) and the corresponding ground truth manual segmentations in (Middle) are in yellow. Final computed segmentations are shown in red in (Right) with Dice coefficients for the volume above each slice. The zoomed-in areas of the slice segmentations in the orange boxes are shown to the right of the image.



Figure 14: Pancreas segmentation result comparison in 3D. The computed 3D pancreas segmentation mask (before 3D connected component based removal) is shown in (Left) and the corresponding ground truth segmentation mask in (Middle) are in red. Their surface-to-surface distance map overlaid on the ground truth mask is demonstrated in (Right). The red color illustrates higher difference and green for smaller distance.

comparisons can be made. From the table, it can be seen that about 2% increase in the Dice coefficient was obtained by using Framework 2, but the main improvement can be noticed in the minimum values (i.e., the lower performance bound) for each of the metrics. Usage of deep patch labeling prevents the case of no pancreas segmentation while keeping slightly higher mean precision and recall values. The standard deviations also dropped nearly 50% comparing F-1 to F-2 (from 25.6% to 13.0% in Dice; and 25.4% to 13.6% in JI). Note that F-1 has the similar standard deviation ranges with the previous methods (Wang et al., 2014; Wolz et al., 2013; Chu et al., 2013; Wolz et al., 2012; Shimizu et al., 2010) and F-2 significantly improves upon all of them. Based on Table 1, we observe that F-2 provides consistent performance improvements over F-1, which implies that CNN based dense patch labeling shows more promising results (Sec. 2.3) than the conventional hand-crafted image features and random forest patch classification alone (Sec. 2.2).

Last, F-1 performs comparably to the state-of-the-art pancreas segmentation methods while F-2 slightly but consistently outperform others, even under six-fold cross-validation (CV) instead

	N	SI (%)	JI (%)	Precision (%)	Recall (%)
F-1	40	60.4 ± 22.3 [2.0, 96.4]	46.7 ± 22.8 [0, 93.0]	55.6 ± 29.8 [1.2, 100]	80.8 ± 21.2 [4.8, 99.8]
F-1	60	64.9 ± 22.6 [0, 94.2]	51.7 ± 22.6 [0, 89.1]	70.3 ± 29.0 [0, 100]	69.1 ± 25.7 [0, 98.9]
F-1	80	68.8 ± 25.6 [0, 96.6]	57.2 ± 25.4 [0, 93.5]	71.5 ± 30.0 [0, 100]	72.5 ± 27.2 [0, 100]
F-2	80	70.7 ± 13.0 [24.4, 85.3]	57.9 ± 13.6 [13.9, 74.4]	71.6 ± 10.5 [34.8, 85.8]	74.4 ± 15.1 [15.0, 90.9]

Table 1: Examination of varying number of patient datasets using framework 1, in four metrics of Dice, JI, precision and recall. Mean, standard deviation, lower and upper performance ranges are reported. Comparison of the presented framework 1 (F-1) versus framework 2 (F-2) in 80 patients is also presented.

Reference	N	SI (%)	JI (%)	Precision (%)	Recall (%)
(Shimizu et al., 2010)	20	-	57.9	-	-
(Okada et al., 2012)	28	-	46.6	-	-
(Wolz et al., 2013)	150	69.6 ± 16.7	55.5 ± 17.1	67.9 ± 18.2	74.1 ± 17.1
(Wolz et al., 2013)	50	58.2 ± 20.0	43.5 ± 17.8	-	-
(Wolz et al., 2012)	100	65.5	49.6	70.7	62.9
(Wang et al., 2014)	100	65.5 ± 18.6	-	-	-
(Chu et al., 2013)	100	69.1 ± 15.3	54.6	-	-
Framework 1	80	68.8 ± 25.6	57.2 ± 25.4	71.5 ± 30.0	72.5 ± 27.2
Framework 2	80	70.7 ± 13.0	57.9 ± 13.6	71.2 ± 10.5	74.4 ± 15.1

Table 2: Comparison of F-1 and F-2 in 6-fold CV to the recent state-of-the-art methods (Wang et al., 2014; Wolz et al., 2013; Chu et al., 2013; Wolz et al., 2012; Shimizu et al., 2010; Okada et al., 2012) in LOO.

of the “leave-one-patient-out” (LOO) used in (Wang et al., 2014; Wolz et al., 2013; Chu et al., 2013; Wolz et al., 2012; Shimizu et al., 2010; Okada et al., 2012). Table 2 reflects the comparison of Dice, JI, precision and recall results, between our methods of F-1, F-2 and other approaches, in multi-atlas registration and label fusion based multi-organ segmentation (Wang et al., 2014; Wolz et al., 2013; Chu et al., 2013; Wolz et al., 2012; Okada et al., 2012) and multi-phase single organ (i.e., pancreas) segmentation (Shimizu et al., 2010). Previous numerical results are found from the publications (Wang et al., 2014; Wolz et al., 2013; Chu et al., 2013; Wolz et al., 2012; Shimizu et al., 2010; Okada et al., 2012). We choose the best result out of different parameter configurations in (Chu et al., 2013). Based on 80 CT datasets, our results are comparable and slightly better than the recent state-of-the-art work (Wang et al., 2014; Wolz et al., 2013; Chu et al., 2013; Wolz et al., 2012; Shimizu et al., 2010). For example, Dice coefficients of $68.8\% \pm 25.6\%$ using F-1 and $70.7\% \pm 13.0\%$ using F-2 are obtained (6-fold CV), versus $69.6\% \pm 16.7\%$ in (Wolz et al., 2013), 65.5% in (Wolz et al., 2012), $65.5\% \pm 18.6\%$ in (Wang et al., 2014) and $69.1\% \pm 15.3\%$ in (Chu et al., 2013) (LOO).

4. CONCLUSION AND DISCUSSION

In summary, two variations of pancreas segmentation methods are presented and exploited in a perspective of bottom-up information propagation from image patches to (segments) superpixels. Both frameworks are carried-out in a six-fold cross validation (CV) manner. Our protocol is arguably harder than the “leave-one-out” (LOO) criterion in (Wang et al., 2014; Wolz et al., 2013; Chu et al., 2013; Wolz et al., 2012; Shimizu et al., 2010) since less patient datasets are used in training and more separate patient scans for testing. In fact, (Wolz et al., 2013) does

demonstrate a notable performance drop from using 149 patients in training versus 49 patients under LOO, i.e., the mean Dice coefficients decreased from $69.6\% \pm 16.7\%$ to $58.2\% \pm 20.0\%$. This indicates that the multi-atlas fusion approaches (Wang et al., 2014; Okada et al., 2012; Wolz et al., 2013; Chu et al., 2013; Wolz et al., 2012; Shimizu et al., 2010) may actually achieve lower segmentation accuracies than reported, if under the six-fold cross validation protocol. At 40 patients, our result using framework 1 is 2.2% better than the reported results by (Wolz et al., 2013) using 50 patients (Dice coefficients of 60.4% versus 58.2%). Comparing to the usage of $N - 1$ patient datasets directly in the memory for multi-atlas registration methods, our learned models are more compactly encoded into a series of patch- and superpixel-level random forest classifiers and the CNN classifier for patch labeling. The computational efficiency also has been drastically improved in the order of 6 ~ 8 minutes per testing case (using a mix of Matlab and C implementation, ~ 50% time for superpixel generation), compared to others requiring 10 hours or more. The segmentation framework (F-2) using deep patch labeling confidences is also more numerically stable, with no complete failure case and noticeable lower standard deviations.

The main component of our method is to classify superpixels into either pancreas or non-pancreas class. Cascaded random forest classifiers are formulated for this task and performed on the pooled superpixel statistical features from intensity values and supervisedly learned class probabilities (P^{RF} and/or P^{CNN}). The conventional approaches for classifying superpixels or image segments in computer vision are “bag-of-words” (Carreira et al., 2012; Chatfield et al., 2011) and “Regional CNN” (R-CNN) (Girshick et al., 2014) models. “Bag-of-words” methods compute dense SIFT, HOG and LBP image descriptors, embed these descriptors through various feature encoding schemes and pool the features inside each superpixel for classification. Both model complexity and computational expense (Carreira et al., 2012; Chatfield et al., 2011) are very high, comparing with ours (Sec. 2.4). R-CNN (Girshick et al., 2014) outperforms previous “Bag-of-words” models in PASCAL VOC object detection and semantic segmentation challenges. A R-CNN implementation on pancreas segmentation has been explored in (Roth et al., 2015) which shows slightly worse result (Dice $68\% \pm 10\%$) than our F-2 framework that spatially pools the CNN patch classification confidences per superpixel. The learned class probability maps (e.g., P^{RF} and P^{CNN}) are treated as the supervised semantic class image embeddings which can be implemented, via an open framework by various methods, to learn the per-pixel class probability response.

To overcome the low image boundary contrast issue in superpixel generation, which is however common in medical imaging, we suggest that efficient supervised edge learning techniques may be utilized to artificially “enhance” the strength of semantic object-level boundary curves in 2D or surface in 3D. For example, one of the future directions is to couple or integrate the structured random forests based edge detection (Dollr and Zitnick, 2015) into a new image segmentation framework (MCG: Multiscale Combinatorial Grouping) (Arbelez et al., 2014) which permits a user-customized image gradient map. This new approach may be capable to generate image superpixels that can preserve even very weak semantic object boundaries well (in the image gradient sense) and subsequently prevent segmentation leakage.

Finally, voxel-level pancreas segmentation masks can be propagated from the stacked superpixel-level classifications and further improved by an efficient boundary refinement post-processing, such as the narrow-band level-set based curve/surface evolution (Shi and Karl, 2008; Kohlberger et al., 2011), or the learned intensity model based graph-cut (Wolz et al., 2013). Further examination into the sub-connectivity processes for the pancreas segmentation framework that considers the spatial relationships of splenic, portal and superior mesenteric veins with pancreas may be needed for future work.

ACKNOWLEDGEMENT

This research was supported by the Intramural Research Program of the National Institutes of Health Clinical Center. We thank Andrew Dwyer, MD at National Institutes of Health Clinical Center for critical review of the manuscript.

References

- Achanta, R., Shaji, A., Smith, K., Lucchi, A., Fua, P., Susstrunk, S., 2012. Slc superpixels compared to state-of-the-art superpixel methods. *IEEE Trans. on Pat. Ana. Mach. Intel.* 34, 2274–2282.
- Arbelez, P., Pont-Tuset, J., Barron, J., Marqus, F., Malik, J., 2014. Multiscale combinatorial grouping, in: *IEEE Conf. CVPR*, pp. 328–335.
- Carreira, J., Caseiro, R., Batista, J., Sminchisescu, C., 2012. Semantic segmentation with second-order pooling, in: *European Conference on Computer Vision*, pp. 430–443.
- Carreira, J., Sminchisescu, C., 2012. Cpmc: Automatic object segmentation using constrained parametric min-cuts. *IEEE Trans. on Pat. Ana. Mach. Intel.* 34, 1312–1328.
- Chatfield, K., Lempitsky, V., Vedaldi, A., Zisserman, A., 2011. The devil is in the details: an evaluation of recent feature encoding methods, in: *BMVC*, pp. 1–12. doi:[10.5244/C.25.76](https://doi.org/10.5244/C.25.76).
- Chu, C., Oda, M., Kitasaka, T., Misawa, K., Fujiwara, M., Hayashi, Y., Nimura, Y., Rueckert, D., Mori, K., 2013. Multi-organ segmentation based on spatially-divided probabilistic atlas from 3d abdominal ct images, in: *MICCAI*, pp. 165–172.
- Comaniciu, D., Meer, P., 2002. Mean shift: a robust approach toward feature space analysis. *IEEE Trans. on Pat. Ana. Mach. Intel.* 24, 603–619.
- Cour, T., Benezit, F., Shi, J., 2005. Spectral segmentation with multiscale graph decomposition. *IEEE Proc. on CVPR*.
- Criminisi, A., Robertson, D., Konukoglu, E., Shotton, J., Pathak, S., White, S., Siddiqui, K., 2013. Regression forests for efficient anatomy detection and localization in computed tomography scans. *Medical Image Analysis* 17, 1293–1303.
- Cuingnet, R., Prevost, R., Lesage, D., Cohen, L., Mory, B., Ardon, R., 2012. Automatic detection and segmentation of kidneys in 3d ct images using random forests, in: *MICCAI*, pp. 66–74.
- Dollr, P., Zitnick, L., 2015. Fast edge detection using structured forests. *IEEE Trans. on Pat. Ana. Mach. Intel.* 37. doi:[10.1109/TPAMI.2014.2377715](https://doi.org/10.1109/TPAMI.2014.2377715).
- Everingham, M., Eslami, S., Gool, L.V., Williams, C.K.I., Winn, J., Zisserman, A., 2015. The pascal visual object classes challenge: A retrospective. *International Journal of Computer Vision* 111, 98–136.
- Farag, A., Lu, L., Turkbey, E., Liu, J., Summers, R., 2014. A bottom-up approach for automatic pancreas segmentation in abdominal ct scans, in: *Abdominal Imaging - Computational and Clinical Applications*, pp. 103–112.
- Felzenszwalb, P., Huttenlocher, D., 2004. Efficient graph-based image segmentation. *International Journal of Computer Vision* 59, 167–181.
- Gilinsky, A., Zelnik-Manor, L., 2013. Siftpack: a compact representation for efficient sift matching, in: *IEEE Conf. ICCV*, pp. 777–784.
- Girshick, R., Donahue, J., Darrell, T., Malik, J., 2014. Rich feature hierarchies for accurate object detection and semantic segmentation, in: *IEEE Conf. CVPR*, pp. 580–587.
- Groeneveld, R., Meeden, G., 1984. Measuring skewness and kurtosis. *The Statistician* 33, 391–399.
- Kim, J., Grauman, K., 2011. Boundary preserving dense local regions, in: *IEEE Conf. CVPR*, pp. 1553–1560.
- Kohlberger, T., Sofka, M., Zhang, J., Birkbeck, N., Wetzl, J., Kaftan, J., Declerck, J., Zhou, S., 2011. Automatic multi-organ segmentation using learning-based segmentation and level set optimization, in: *MICCAI*, pp. 338–345.
- Krizhevsky, A., Sutskever, I., Hinton, G.E., 2012. Imagenet classification with deep convolutional neural networks, in: *Advances in neural information processing systems*, pp. 1097–1105.
- Ling, H., Zhou, S., Zheng, Y., Georgescu, B., Suehling, M., Comaniciu, D., 2008. Hierarchical, learning-based automatic liver segmentation, in: *IEEE Conf. CVPR*, pp. 1–8.
- Liu, M., Tuzel, O., Ramalingam, S., Chellappa, R., 2011. Entropy rate superpixel segmentation, in: *IEEE Conf. CVPR*, pp. 2099–2104.
- Lowe, D., 2004. Distinctive image features from scale-invariant keypoints. *International Journal of Computer Vision* 60, 91–110.
- Lucchi, A., Smith, K., Achanta, R., Knott, G., Fua, P., 2012. Supervoxel-based segmentation of mitochondria in em image stacks with learned shape features. *IEEE Trans. on Medical Imaging* 31, 474–486.
- Mahapatra, D., Schuffler, P., Tielbeek, J., Makanyanga, J., Stoker, J., Taylor, S., Vos, F., Buhmann, J., 2013. Automatic detection and segmentation of crohn's disease tissues from abdominal mri. *IEEE Trans. on Medical Imaging* 32, 2332–2348.

- Mansoor, A., Bagci, U., Xu, Z., Foster, B., Olivier, K., Elinoff, J., Suffredini, A., Udupa, J., Mollura, D., 2014. A generic approach to pathological lung segmentation. *IEEE Trans. on Medical Imaging* 33, 2293–2310.
- Neubert, P., Protzel, P., 2012. Superpixel benchmark and comparison, in: *Proc. Forum Bildverarbeitung*, pp. 1–12.
- Okada, T., Linguraru, M., Yoshida, Y., Hor, M., Summers, R., Chen, Y., Tomiyama, N., Sato, Y., 2012. Abdominal multi-organ segmentation of ct images based on hierarchical spatial modeling of organ interrelations, in: *Abdominal Imaging - Computational and Clinical Applications*, pp. 173–180.
- Roth, H., Farag, A., Lu, L., Turkbey, E., Liu, J., Summers, R., 2015. Deep convolutional networks for pancreas segmentation in ct imaging, in: *SPIE Conf. Medical Imaging*, pp. 1–8. doi:[10.1117/12.2081420](https://doi.org/10.1117/12.2081420).
- Shi, Y., Karl, W., 2008. A real-time algorithm for the approximation of level-set-based curve evolution. *IEEE Trans. Image Processing* 17, 645–656.
- Shimizu, A., Kimoto, T., Kobatake, H., Nawano, S., Shinozaki, K., 2010. Automated pancreas segmentation from three-dimensional contrast-enhanced computed tomography. *Int. J. Comput. Assist. Radiol. Surg.* 5, 85–98.
- Srivastava, N., Hinton, G., Krizhevsky, A., Sutskever, I., Salakhutdinov, R., 2014. Dropout: A simple way to prevent neural networks from overfitting. *The Journal of Machine Learning Research* 15, 1929–1958.
- Vedaldi, A., Fulkerson, B., 2008. VLFeat: An open and portable library of computer vision algorithms. <http://www.vlfeat.org/>.
- Vincent, L., Soille, P., 1991. Watersheds in digital spaces: An efficient algorithm based on immersion simulations. *IEEE Trans. on Pat. Ana. Mach. Intel.* 13, 583–598.
- Viola, P., Jones, M., 2004. Robust real-time face detection. *International Journal of Computer Vision* 57, 137–154.
- Wang, Z., Bhatia, K., Glocker, B., Marvao, A., Dawes, T., Misawa, K., Mori, K., Rueckert, D., 2014. Geodesic patch-based segmentation, in: *MICCAI*, pp. 666–673.
- Wolz, R., Chu, C., Misawa, K., Fujiwara, M., Mori, K., Rueckert, D., 2013. Automated abdominal multi-organ segmentation with subject-specific atlas generation. *IEEE Trans. on Medical Imaging* 32, 1723–1730.
- Wolz, R., Chu, C., Misawa, K., Mori, K., Rueckert, D., 2012. Multi-organ abdominal ct segmentation using hierarchically weighted subject-specific atlases, in: *MICCAI*, pp. 10–17.
- Yadollahpour, P., Batra, D., Shakhnarovich, G., 2013. Discriminative re-ranking of diverse segmentations, in: *IEEE Conf. CVPR*, pp. 2099–2104.
- Zheng, Y., Barbu, A., Georgescu, B., Scheuering, M., Comaniciu, D., 2008. Four-chamber heart modeling and automatic segmentation for 3d cardiac ct volumes using marginal space learning and steerable features. *IEEE Trans. on Medical Imaging* 27, 1668–1681.